

1-Cylinder Diaphragm Pump


To the promotion of gaseous media at technology (A-2)

Made in Germany – ISO 9001 certified




hyco®

more information: PB-33


www.hyco.de

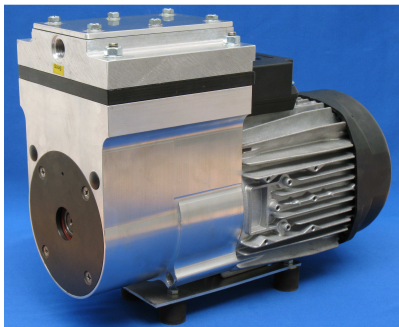

Technology
(A-2)

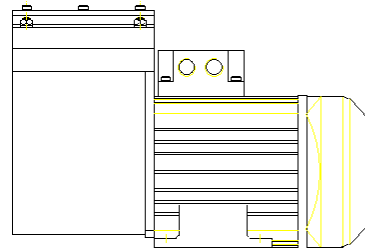

Technical Data:	MP130-H?	MP130-H8,6	MP130-H10
Free flow l/min	in planning	90	107
Final vacuum mbar		100	90
Final pressure (abs.)		3 bar	
Pump heads		1	
Hose coupling, suction / pressure		G 3/8"	
Mains requirement - Frequencies		230V-50Hz oder 230/400V-50Hz	
Motor power / r.p.m.		0,45 KW / 1400 min ⁻¹	
Ex-Motor		not possible	
Noise level dB(A)		53 to 57	
Permissible gas admission temp. °C		+ 5 to + 45	
Permissible ambient temperature °C		+ 5 to + 45	
Dimensions mm L x W x H		382 x 159 x 256	
Weight ca. kg		19,0	
Impermeable to gas		1 x 10 ⁻³ mbar x l/s (unexamined)	

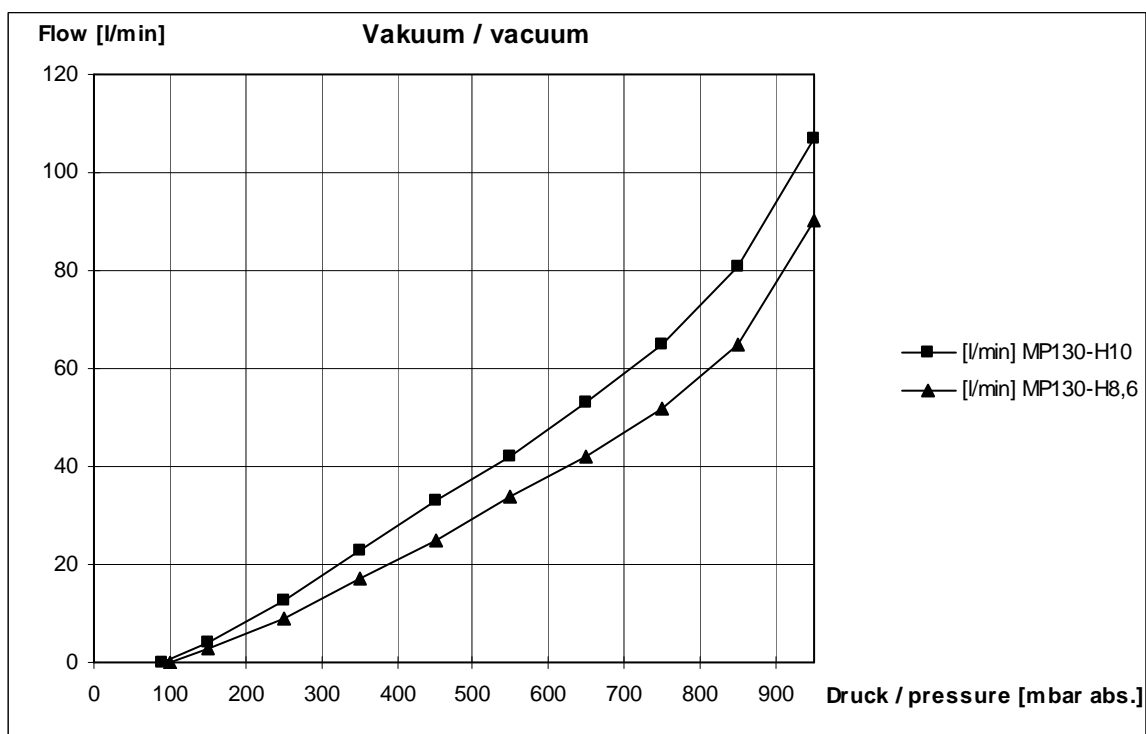

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901

Internet: www.hyco.de • eMail: info@hyco.de