

# 2-Cylinder Piston Pump


To the promotion of gaseous media at technology (A-2)

Made in Germany – ISO 9001 certified




# hyco®

more information: PB-38


[www.hyco.de](http://www.hyco.de)

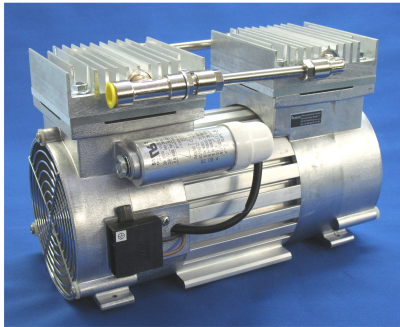

Technology (A-2)

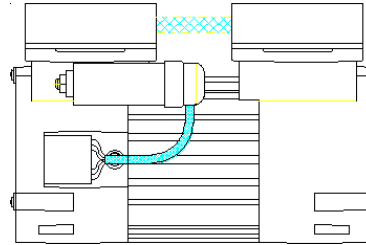

Technical Data:		KPZ50.22-H5-W14	KPZ50.22-H6-W14	KPZ50.22-H8-W14	KPZ50.22-H9-W14	KPZ50.23-H5-W14	KPZ50.23-H6-W14	KPZ50.23-H8-W14	KPZ50.23-H9-W14
Free flow	l/min	29	34	45,5	50	14,5	17,2	23,5	26,2
Final vacuum	mbar	160	150	125	100	45	35	25	15
Final pressure	(abs.)	6 bar	7 bar	8 bar		8 bar		6 bar	5 bar
Pump heads		2							
Hose coupling, suction / pressure		G 1/4"							
Mains requirement - Frequencies		230V-50 Hz or 115V-60 Hz							
Motor power / r.p.m.		0,212 / 1400 min <sup>-1</sup>							
Ex-Motor		not possible							
Noise level	dB(A)	53 to 57							
Permissible gas admission temp.	°C	+ 5 to + 45							
Permissible ambient temperature		+ 5 to + 45							
Dimensions mm	L x W x H	255 x 134,5 x 173,5							
Weight ca.	kg	8,3							
Impermeable to gas		not possible							

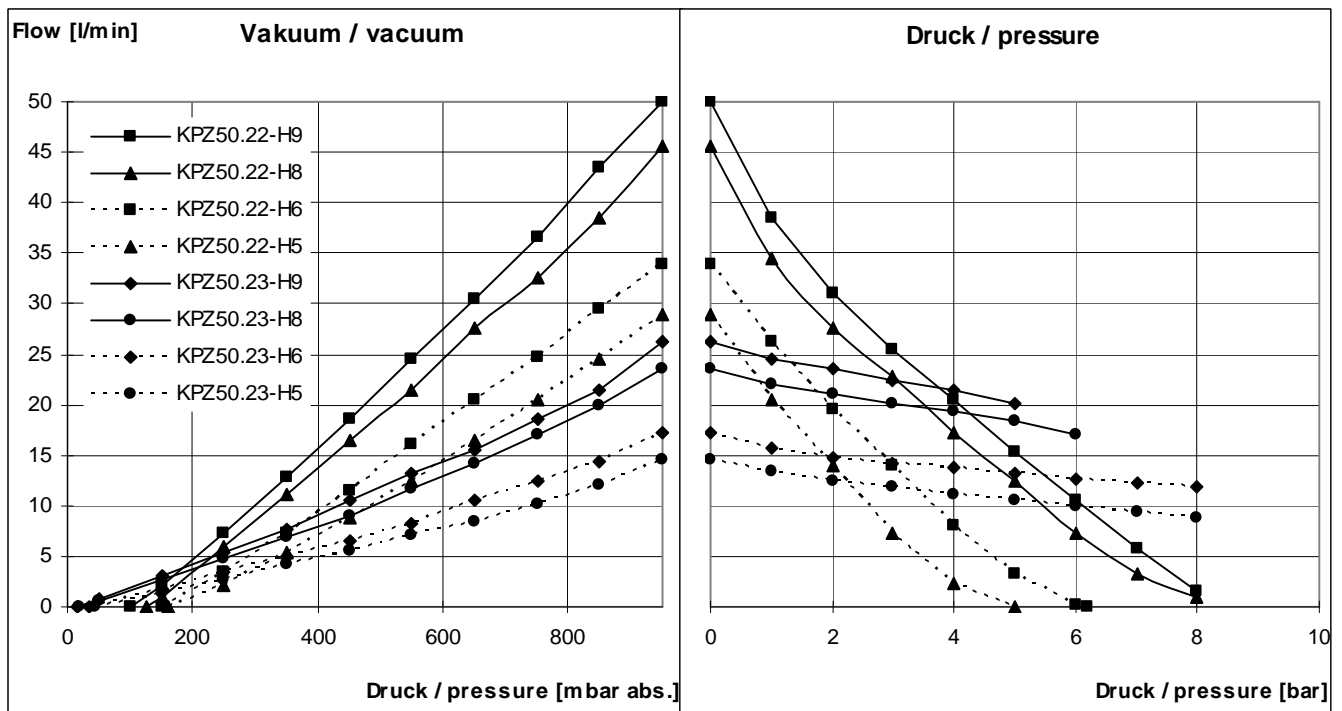

## hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901

Internet: [www.hyco.de](http://www.hyco.de) • eMail: [info@hyco.de](mailto:info@hyco.de)