


2-Cylinder Piston Pump

To the promotion of gaseous media at technology (A-2)






Made in Germany – ISO 9001 certified


more information: PB-39
www.hyco.de

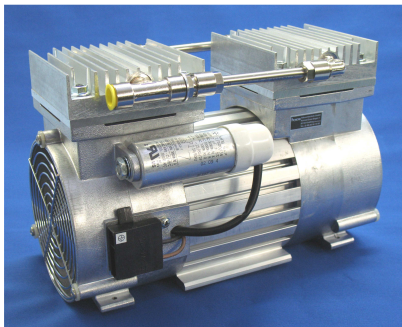

Technology (A-2)

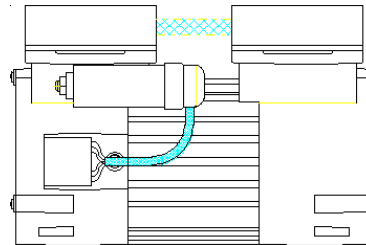

Technical Data:		KPZ60.22-H5-W14	KPZ60.22-H6-W14	KPZ60.22-H8-W14	KPZ60.22-H9-W14	KPZ60.23-H5-W14	KPZ60.23-H6-W14	KPZ60.23-H8-W14	KPZ60.23-H9-W14
Free flow	l/min	39,5	47,5	63,5	72	21,5	25,2	33,8	37
Final vacuum	mbar	150	125	100	85	35	30	20	15
Final pressure	(abs.)	6 bar		1 bar		6 bar	5 bar	3 bar	2 bar
Pump heads		2							
Hose coupling, suction / pressure		G 1/4"							
Mains requirement - Frequencies		230V-50 Hz or 115V-60 Hz							
Motor power / r.p.m.		0,212 / 1400 min ⁻¹							
Ex-Motor		not possible							
Noise level	dB(A)	53 to 57							
Permissible gas admission temp. °C		+ 5 to + 45							
Permissible ambient temperature		+ 5 to + 45							
Dimensions mm	L x W x H	255 x 134,5 x 173,5							
Weight ca.	kg	8,3							
Impermeable to gas		not possible							

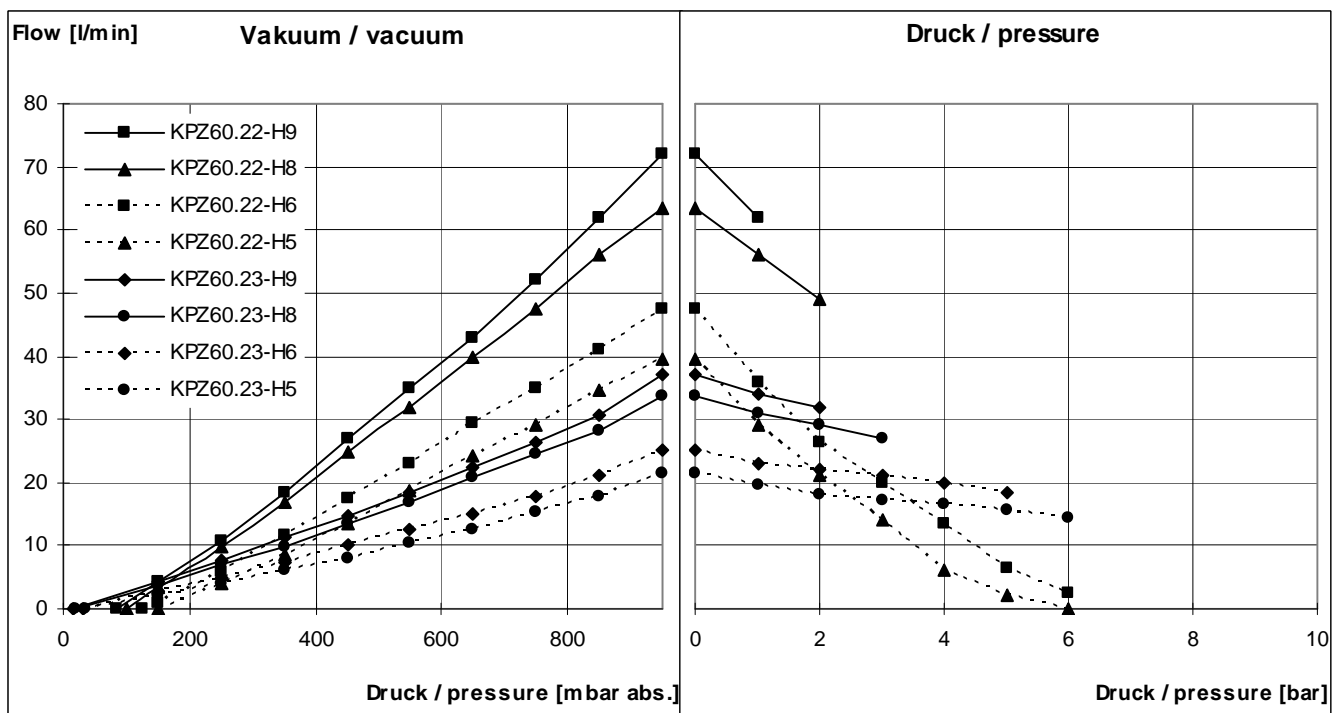

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901
 Internet: www.hyco.de • eMail: info@hyco.de