


2-Cylinder Small Diaphragm Pump

To the promotion of gaseous media at technology (A-1)






Made in Germany – ISO 9001 certified


more information: PB-4
www.hyco.de



Technology (A-1)



Technical Data:	ML48.22-AW14	ML48.23-AW14	ML48.22-AW26	ML48.23-AW26
Free flow l/min	12,3	6,8	26	11,5
Final vacuum mbar	100	12	85	12
Final pressure (abs.)	3 bar			
Pump heads	2			
Hose coupling, suction / pressure	G 1/8"			
Mains requirement - Frequencies	230V-50 Hz or 12VDC or 24VDC			
Motor power / r.p.m.	0,068 KW / 1400 min ⁻¹		0,09 KW / 2600 min ⁻¹	
Ex-Motor	not possible			
Noise level dB(A)	49 to 53			
Permissible gas admission temp. °C	+ 5 to + 45			
Permissible ambient temperature °C	+ 5 to + 45			
Dimensions mm L x W x H	145 x 95 x 140			
Weight ca. kg	2,8			
Impermeable to gas	1 x 10 ⁻³ mbar x l/s (unexamined)			

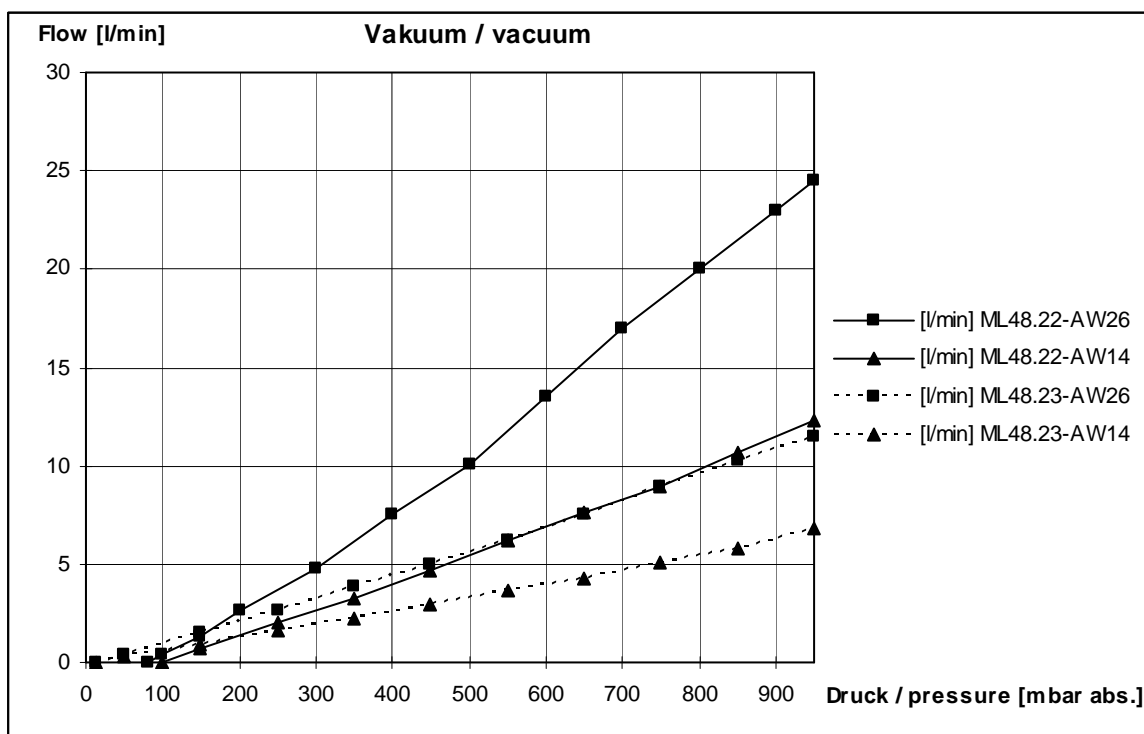

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901
 Internet: www.hyco.de • eMail: info@hyco.de