


4-Cylinder Diaphragm Pump

To the promotion of gaseous media at technology (A-1)




Made in Germany – ISO 9001 certified

hyco®


more information: PB-8
www.hyco.de

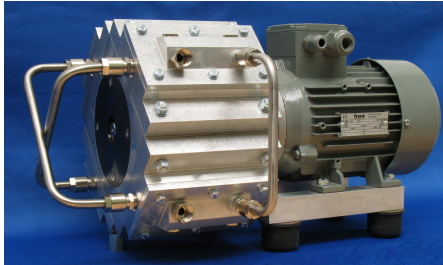

Technology (A-1)



Technical Data:	ML130.45	ML130.46	ML130.48
Free flow l/min	360	175	155
Final vacuum mbar	75	9	2
Final pressure with KG-Gear (abs.)	2 bar		
Final pressure with PR-Gear (abs.)	high pressure upon request		
Pump heads	4		
Hose coupling, suction / pressure	G 3/8" + G1/2"		
Mains requirement - Frequencies	230V-50Hz or 230/400V-50Hz		
Motor power / r.p.m.	0,75 KW / 1400 min ⁻¹		
Ex-Motor	upon request		
Noise level dB(A)	58 to 60		
Permissible gas admission temp. °C	+ 5 to + 45		
Permissible ambient temperature °C	+ 5 to + 45		
Dimensions mm L x W x H	467 x 338 x 338		
Weight ca. kg	26,0		
Impermeable to gas	1 x 10 ⁻³ mbar x l/s (unexamined)		

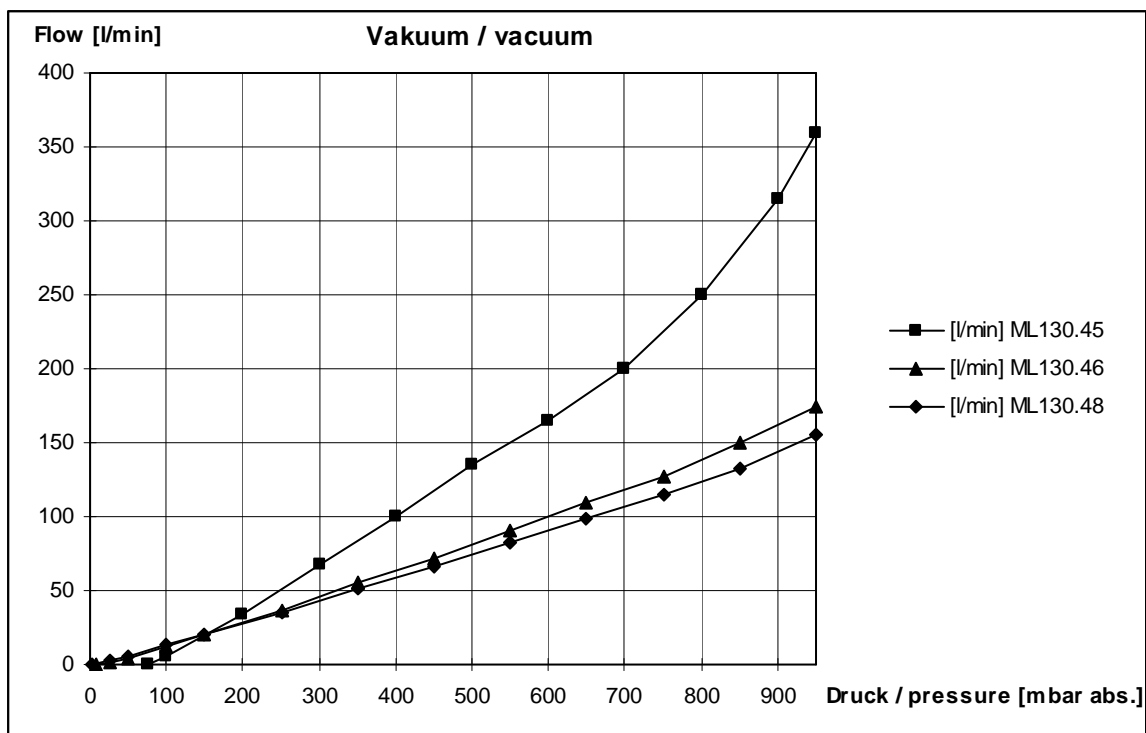

hyco-Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901
 Internet: www.hyco.de • eMail: info@hyco.de