

2-Cylinder Diaphragm Pump


To the promotion of gaseous media at technology (A-2)






Made in Germany – ISO 9001 certified

more information: PB-24


www.hyco.de

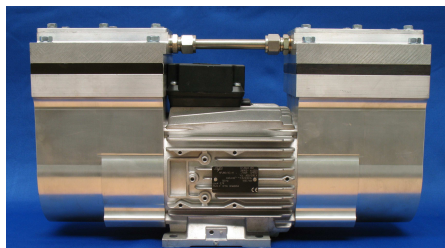

Technology (A-2)

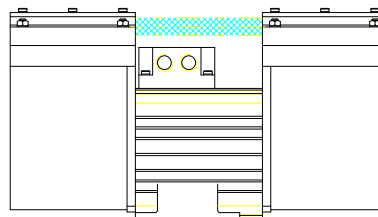

Technical Data:		MPZ130.22-H10	MPZ130.23-H10	MPZ130.22-H8,6	MPZ130.23-H8,6
Free flow	l/min	180	112	150	90
Final vacuum	mbar	80	9	110	19
Final pressure	(abs.)	3 bar			
Pump heads		2			
Hose coupling, suction / pressure		G 3/8"			
Mains requirement - Frequencies		230V-50Hz or 230/400V-50Hz			
Motor power / r.p.m.		0,45 KW / 1400 min ⁻¹			
Ex-Motor		not possible			
Noise level	dB(A)	53 to 57			
Permissible gas admission temp. °C		+ 5 to + 45			
Permissible ambient temperature °C		+ 5 to + 45			
Dimensions mm	L x W x H	452 x 159 x 256			
Weight ca.	kg	23			
Impermeable to gas		1 x 10 ⁻³ mbar x l/s (unexamined)			

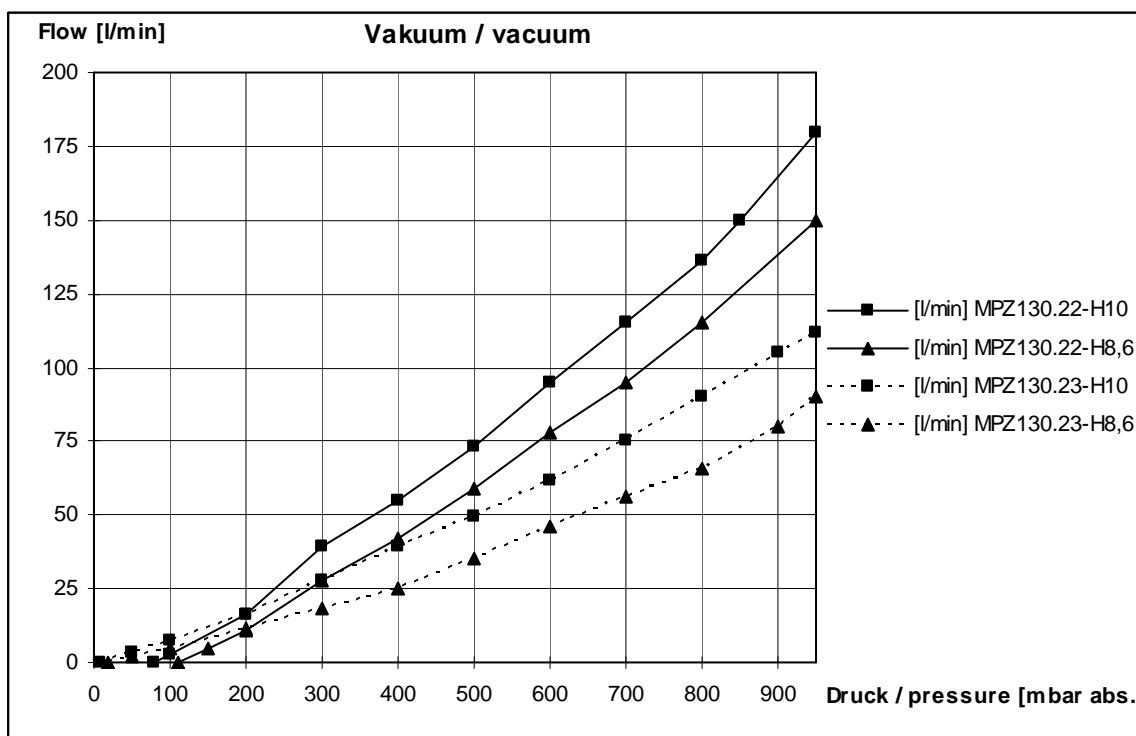

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901

Internet: www.hyco.de • eMail: info@hyco.de