


# 2-Cylinder PTFE-Laboratory Diaphragm Pump

To the promotion of gaseous media at technology (A-2)






Made in Germany – ISO 9001 certified


more information: PB-28  
[www.hyco.de](http://www.hyco.de)

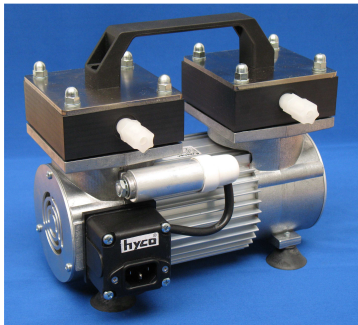

Technology (A-2)



Technical Data:		T-MPZ 65.23	T-MPZ 75.23-H5	T-MPZ 75.23	T-MPZ 86.23-H6	T-MPZ 86.23
Free flow	l/min	8,4	16	21,5	25,5	33
Final vacuum	mbar	45	20	25	20	15
Final pressure	(abs.)	3 bar	2 bar		1 bar	
Pump heads		2				
Hose coupling, suction / pressure		NPT 1/4"				
Mains requirement - Frequencies		230V-50 Hz or 115V-60 Hz				
Motor power / r.p.m.		0,09 KW / 1400 min <sup>-1</sup>				
Ex-Motor		not possible				
Noise level	dB(A)	49 to 53				
Permissible gas admission temp. °C		+ 5 to + 45				
Permissible ambient temperature °C		+ 5 to + 45				
Dimensions mm	L x W x H	234 x 131 x 159				
Weight ca.	kg	5,5				
Impermeable to gas		1 x 10 <sup>-3</sup> mbar x l/s (unexamined)				

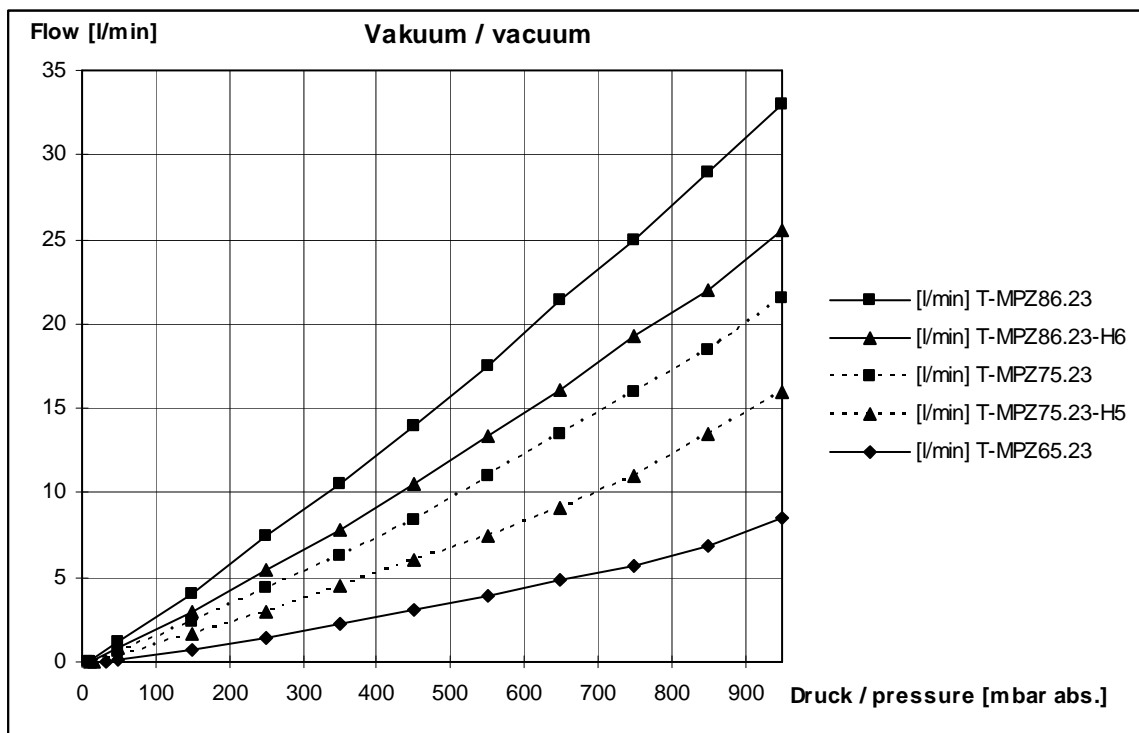

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901  
 Internet: [www.hyco.de](http://www.hyco.de) • eMail: [info@hyco.de](mailto:info@hyco.de)