

1-Cylinder Diaphragm Pump

To the promotion of gaseous media at technology (A-2)

Made in Germany – ISO 9001 certified




hyco®

more information: PB-31


www.hyco.de



Technology (A-2)

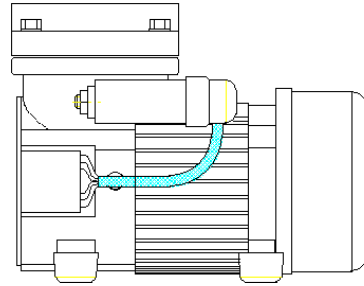

Technical Data:	MPS65-W14	MPS75-W14	MPS86-W14
Free flow l/min	8,4	23,5	33
Final vacuum mbar	150	95	85
Final pressure (abs.)	3 bar	2 bar	1 bar
Pump heads	1		
Hose coupling, suction / pressure	G 1/4"		
Mains requirement - Frequencies	230V-50 Hz or 115V-60 Hz		
Motor power / r.p.m.	0,04 KW / 1400 min ⁻¹		
Ex-Motor	not possible		
Noise level dB(A)	57 to 59		
Permissible gas admission temp. °C	+ 5 to + 45		
Permissible ambient temperature °C	+ 5 to + 45		
Dimensions mm L x W x H	204 x 119,5 x 157,5		
Weight ca. kg	3,5		
Impermeable to gas	1 x 10 ⁻³ mbar x l/s (unexamined)		

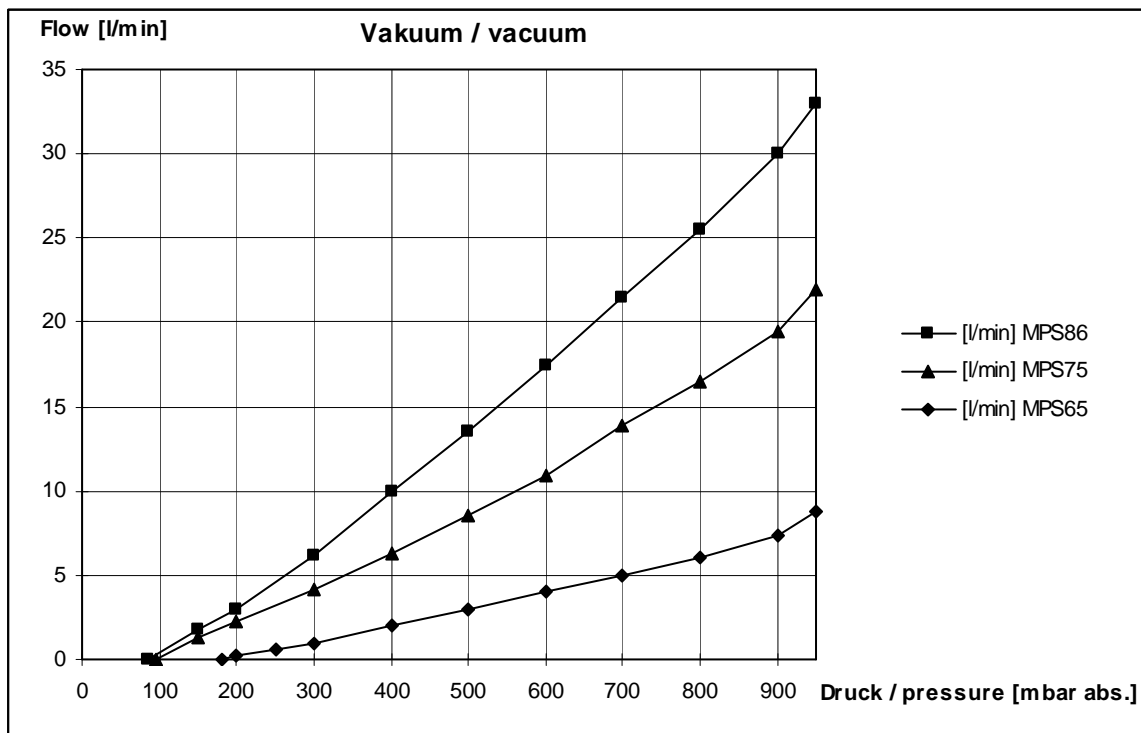

hyco Vakuümtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901

Internet: www.hyco.de • eMail: info@hyco.de