


1-Cylinder Piston Pump

To the promotion of gaseous media at technology (A-2)




Made in Germany – ISO 9001 certified

hyco®


more information: PB-35
www.hyco.de

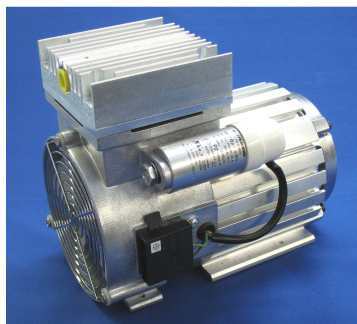

Technology (A-2)



Technical Data:		KP50-H5-W14	KP50-H6-W14	KP50-H8-W14	KP50-H9-W14
Free flow	l/min	15,5	18,5	23	27
Final vacuum	mbar	160	140	120	105
Final pressure	(abs.)	6 bar	7 bar	8 bar	8 bar
Pump heads		1			
Hose coupling, suction / pressure		G 1/4"			
Mains requirement - Frequencies		230V-50 Hz or 115V-60 Hz			
Motor power / r.p.m.		0,212 KW / 1400 min ⁻¹			
Ex-Motor		not possible			
Noise level	dB(A)	53 to 57			
Permissible gas admission temp. °C		+ 5 to + 45			
Permissible ambient temperature		+ 5 to + 45			
Dimensions mm	L x W x H	197 x 134,5 x 173,5			
Weight ca.	kg	6,0			
Impermeable to gas		not possible			

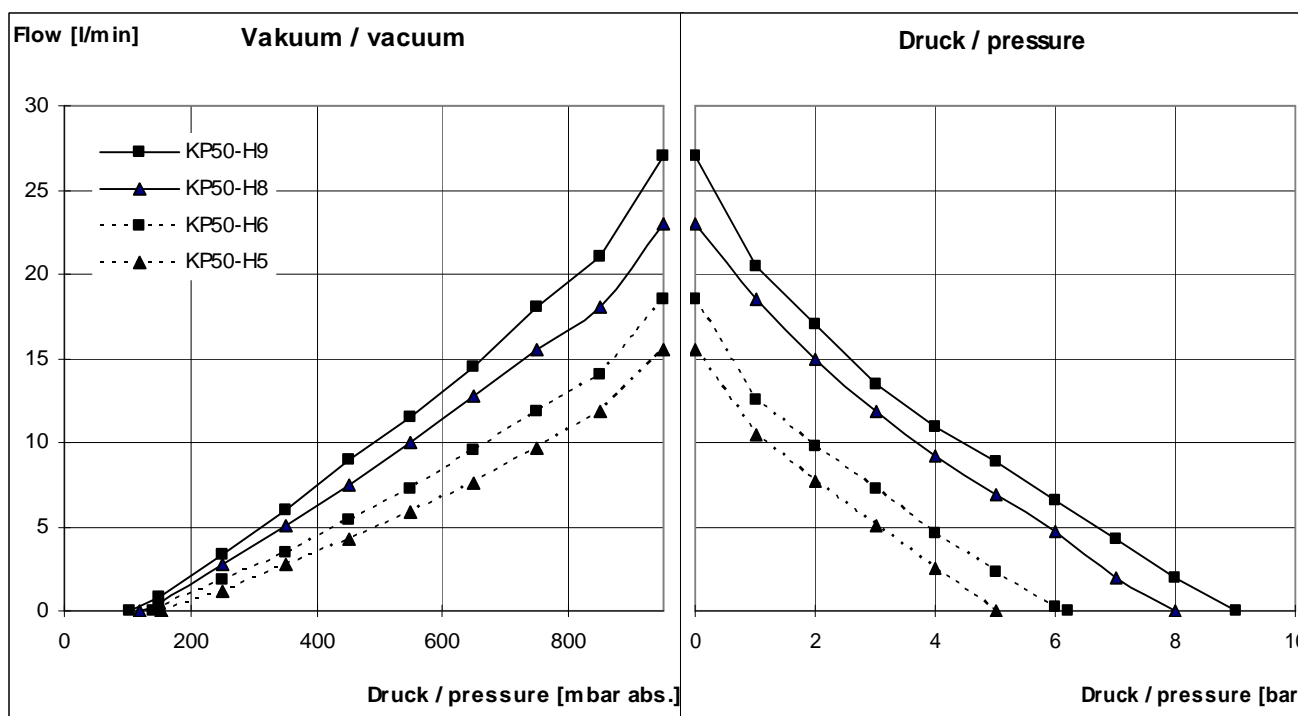

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901
 Internet: www.hyco.de • eMail: info@hyco.de