


1-Cylinder Piston Pump

To the promotion of gaseous media at technology (A-2)




Made in Germany – ISO 9001 certified

hyco®


more information: PB-36
www.hyco.de

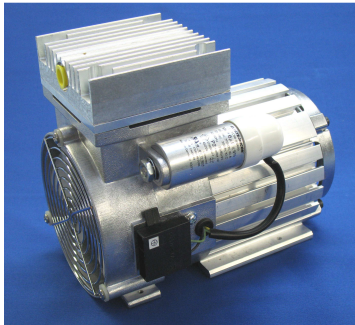

Technology (A-2)



| Technical Data: | KP60-H5-W14 | KP60-H6-W14 | KP60-H8-W14 | KP60-H9-W14 |
|------------------------------------|-----------------------------------|-------------|-------------|-------------|
| Free flow l/min | 23 | 26,5 | 35 | 38,5 |
| Final vacuum mbar | 130 | 120 | 100 | 90 |
| Final pressure admissible (abs.) | 6 bar | | | |
| Pump heads | 1 | | | |
| Hose coupling, suction / pressure | G 1/4" | | | |
| Mains requirement - Frequencies | 230V-50 Hz or 115V-60 Hz | | | |
| Motor power / r.p.m. | 0,212 KW / 1400 min ⁻¹ | | | |
| Ex-Motor | not possible | | | |
| Noise level dB(A) | 53 to 57 | | | |
| Permissible gas admission temp. °C | + 5 to + 45 | | | |
| Permissible ambient temperature | + 5 to + 45 | | | |
| Dimensions mm L x W x H | 197 x 134,5 x 173,5 | | | |
| Weight ca. kg | 6,0 | | | |
| Impermeable to gas | not possible | | | |

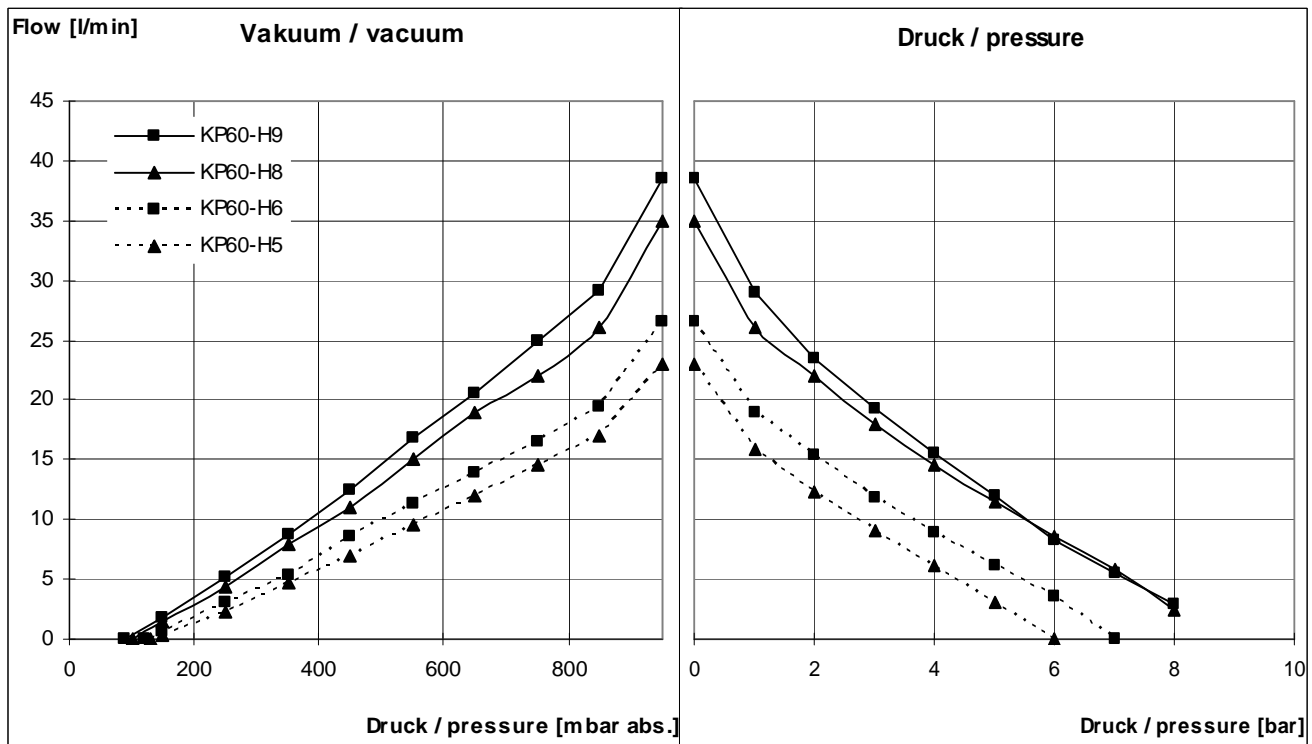

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901
 Internet: www.hyco.de • eMail: info@hyco.de