

# 2-Cylinder Diaphragm Pump

Drive via magnetic coupling  
To the promotion of gaseous media at technology (A-1)

Made in Germany – ISO 9001 certified



# hyco®

more information: PB-42


[www.hyco.de](http://www.hyco.de)



Technology (A-1)

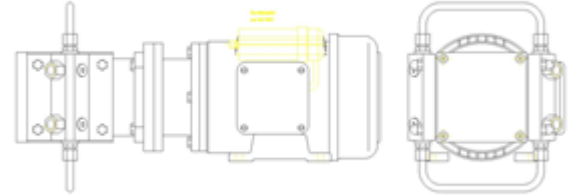

Technical Data:	ML65.22-	ML65.23-	ML75.22-	ML75.23-	ML86.22-	ML86.23-
Free flow l/min	17	8,5	42	21,5	65	33
Final vacuum mbar	150	35	85	15	80	7
Final pressure with KG-Gear (abs.)	3 bar		2 bar		1 bar	
Pump heads	2					
Hose coupling, suction / pressure	G 1/4"					
Mains requirement - Frequencies	230V-50Hz or 230/400V-50Hz					
Motor power / r.p.m.	0,37					
Ex-Motor	upon request					
Noise level dB(A)	49 to 53					
Permissible gas admission temp. °C	+ 5 to + 45					
Permissible ambient temperature °C	+ 5 to + 45					
Dimensions mm L x W x H	406,5 x 175 x 210					
Weight ca. kg	15,0					
Impermeable to gas	1 x 10 <sup>-5</sup> mbar x l/s (unexamined)					

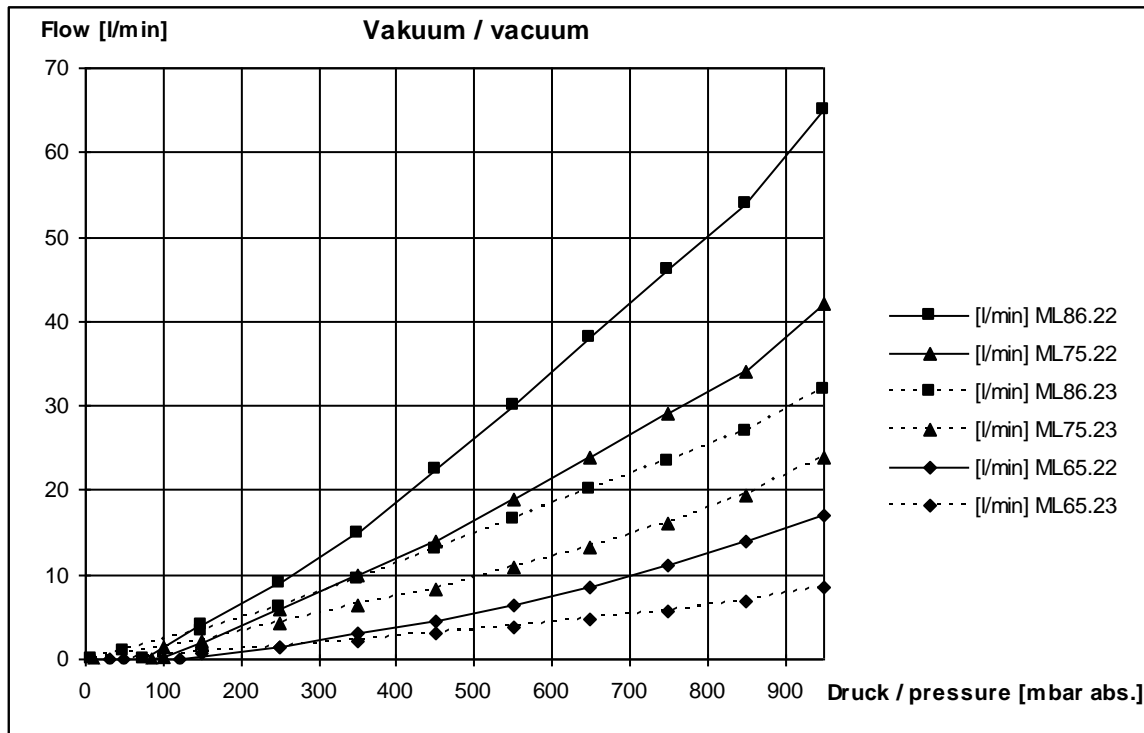

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailling (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901

Internet: [www.hyco.de](http://www.hyco.de) • eMail: [info@hyco.de](mailto:info@hyco.de)